



COMBINATION CURB AND GUTTER (CG-1)

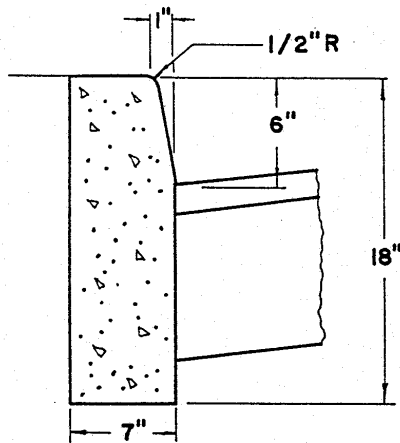

HEADER CURB (C-1)

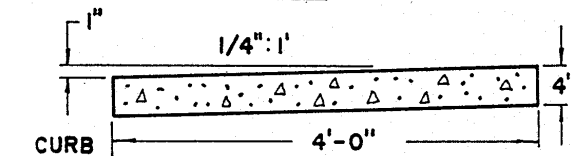

SIDEWALK (SW-1)

ALL CURB, GUTTER, AND  
SIDEWALK SHALL BE OF  
V.D.H. CLASS 'A' (AE) CONCRETE

## GENERAL NOTES

CURB AND GUTTER CONSTRUCTION SHALL BE IN SECTIONS OF UNIFORM LENGTH APPROXIMATELY TEN (10) FEET, AND NO SECTION SHALL BE LESS THAN SIX (6) FEET IN LENGTH.

EXPANSION JOINTS SHALL BE PLACED IN HEADER CURB, COMBINATION CURB AND GUTTER, AND SIDEWALK EVERY FORTY (40) FEET. WHERE STATIONARY STRUCTURES SUCH AS DROP INLETS, MANHOLES, ETC. ARE WITHIN THE LIMITS OF THE CURB AND GUTTER, AND SIDEWALK, AN EXPANSION JOINT SHALL BE PLACED BETWEEN THE STRUCTURE AND THE CURB AND GUTTER AND SIDEWALK.

TRANSVERSE SCORING SHALL BE PROVIDED IN THE SIDEWALK EVERY FOUR (4) FEET AND SHALL EXTEND TO AT LEAST ONE-THIRD (1/3) OF THE DEPTH OF THE SLAB.

IN CONGESTED AREAS, OR WHEN DEEMED NECESSARY BY THE ENGINEER, SIDEWALK MAY BE REQUIRED TO BE FIVE (5) FEET IN WIDTH WITH TRAVERSE SCORING EVERY FIVE (5) FEET.

4-22-70

CG-1

C-1

SW-1

## REVISIONS


FAUQUIER COUNTY

COMBINATION CURB AND  
GUTTER — HEADER CURB  
SIDEWALK